arXiv:1212.4212v1 [math.DS] 13 Dec 2012

Floquet Theory for Systems with Memory

Fabio L. Traversa,[1, 2, *] Massimiliano Di Ventra,[2, †] and Fabrizio Bonani[3, ‡]
[1] *Departament d'Enginyeria Electrònica, Universitat Autònoma de Barcelona, 08193-Bellaterra (Barcelona), Spain*
[2] *Department of Physics, University of California, San Diego, La Jolla, California 92093, USA*
[3] *Dipartimento di Elettronica e Telecomunicazioni, Politecnico di Torino, 10129 Torino, Italy*

(Dated: December 19, 2012)

Floquet theory is a powerful tool in the analysis of many physical phenomena. However, in its original formulation it is limited to linear systems with time-periodic coefficients. Here, we extend the theory by proving a theorem for the general class of systems including linear operators commuting with the period-shift operator. This class of systems ultimately includes those whose state depends on their full dynamical history. The present theorem greatly expands the range of applicability of Floquet theory to a multitude of phenomena that were previously inaccessible with this type of analysis. As an example, we provide the Floquet analysis of a Brownian particle with memory.

PACS numbers: 05.45.-a, 02.30.Oz, 02.30.Sa, 84.30.Bv

Floquet theory is a century-old theory that allows an easy analysis of the solutions of linear differential equations that have periodic coefficients [1, 2]. These types of equations are very common in several areas of science and technology, and as such the applications of Floquet theory range from quantum [3, 4] to classical [5, 6] physics, chemistry [7], electronics [8, 9], dynamical systems [10] and many more. However, its original formulation is limited to linear systems with periodic coefficients. Consequently, it is a powerful tool to study nonlinear perturbations, noise, and stability of systems depending *instantaneously* on time, and admitting periodic steady states.

This leaves out many important phenomena that cannot be simply described using these types of equations. This is the case, for example, of all systems whose state depends on their past dynamics. These systems are the norm rather than the exception in natural phenomena [11] and their applications span a wide range of problems (see, e.g., [12] for recent examples). It would be thus of great value to extend Floquet theory to such systems.

There have been some previous attempts to generalize Floquet theory to systems with memory. The most important one is certainly the work of Hale and Verduyn Lunel [13]. They have derived a generalization of Floquet theory for linear equations of the type

$$\frac{\mathrm{d}\mathbf{z}}{\mathrm{d}t} = \mathcal{L}_{\mathcal{P}}\left\{\mathbf{z}, t\right\} \tag{1}$$

where $\mathcal{L}_{\mathcal{P}}$ is a linear operator with the most important restriction that it is T-periodic, i.e., $\mathcal{L}_{\mathcal{P}}\{\mathbf{z}, t+T\} = \mathcal{L}_{\mathcal{P}}\{\mathbf{z}, t\}$ for any t and any vector function $\mathbf{z}$. However, this set of linear operators clearly does not cover the entire class of systems with memory. In fact, a general linear system with memory can be characterized by the linear operator

$$\mathcal{L}_{\mathcal{T}}\left\{\mathbf{z}, t\right\} = \int_{t-r}^{t} \mathbf{K}(t;\tau)\mathbf{z}(\tau)\ \mathrm{d}\tau \tag{2}$$

where $r > 0$ and $\mathbf{K}$ is a matrix such that the integral of $\mathbf{K}(t;\tau)$ with respect to τ is bounded for every t, and $\mathbf{K}(t+T;\tau+T) = \mathbf{K}(t;\tau)$. The latter condition (sometimes called bi-periodicity) is not enough to guarantee the periodicity of $\mathcal{L}_{\mathcal{T}}$ for any $\mathbf{z}$, but it is just true when $\mathbf{z}$ is T-periodic. However, by defining the time translation operator $\mathcal{T}$ as the linear operator $\mathcal{T}\left\{\mathbf{v}(t)\right\} = \mathbf{v}(t+T)$, it is simple to prove that $\mathcal{L}_{\mathcal{T}}$ commutes with $\mathcal{T}$. This simple remark suggests that Floquet theory could be extended to systems including *all* linear operators commuting with $\mathcal{T}$, thus allowing for the analysis of systems with memory.

In this letter, we indeed state and demonstrate a theorem that extends Floquet theory to such cases. The proof of the theorem relies only on well-known concepts of functional analysis, such as topological vector space and Banach algebra [14]. We then apply the theorem to the important problem of a Brownian particle with memory, where the latter is due to the presence of a friction retardation function. In particular, we show how the Floquet theory enormously simplifies the study of the dynamical properties of this system.

Let us then start by considering nonlinear dynamical systems described by a differential equation of the type

$$\frac{\mathrm{d}\mathbf{y}}{\mathrm{d}t} = \mathbf{f}(\mathbf{y}, t) + \mathcal{L}'_{\mathcal{T}}\left\{\mathbf{g}(\mathbf{y}, t), t\right\} \tag{3}$$

where $\mathbf{y} : \mathbb{R} \to \mathbb{R}^n$, $\mathbf{f}, \mathbf{g} : \mathbb{R}^{n+1} \to \mathbb{R}^n$ are nonlinear vector fields with $\mathbf{f}$ T-periodic with respect to t, and $\mathcal{L}'_{\mathcal{T}}$ is a generic, linear integro-differential operator such that $\mathcal{L}'_{\mathcal{T}}\left\{\mathbf{g}(\mathbf{y}, t), t\right\}$ is T-periodic if $\mathbf{y}(t)$ is T-periodic. We assume that (3) admits of a T-periodic solution $\mathbf{y}_{\mathrm{S}}$ (limit cycle). Dynamical systems with memory are included in (3) as convolution operators (2).

The study of the perturbation of the limit cycle $\mathbf{y}_{\mathrm{S}}$ is important both for assessing the stability of the solution and for analyzing the effect of small-amplitude forcing terms such as Langevin sources used to represent fluctuation effects. Perturbations are studied by linearizing (3) around $\mathbf{y}_\mathrm{S}$ yielding a linear periodic time-varying system

$$\frac{\mathrm{d}\mathbf{z}}{\mathrm{d}t} = \mathbf{A}(t)\mathbf{z} + \mathcal{L}_{\mathcal{T}}\left\{\mathbf{z}, t\right\} + \mathbf{b}(t) \tag{4}$$

where $\mathbf{z} : \mathbb{R} \to \mathbb{R}^n$, $\mathbf{A}(t)$ is the T-periodic Jacobian matrix of $\mathbf{f}(\cdot, t)$ evaluated in the limit cycle, and $\mathbf{b}(t)$ is the perturbation forcing term. Finally, $\mathcal{L}_{\mathcal{T}}$ is the linear operator defined as $\mathcal{L}_{\mathcal{T}}\left\{\cdot, t\right\} = \mathcal{L}'_{\mathcal{T}}\left\{\mathbf{B}(t)\cdot\right\}$, where $\mathbf{B}(t)$ is the Jacobian matrix of $\mathbf{g}(\cdot, t)$ evaluated in $\mathbf{y}_\mathrm{S}$. The solution of the homogeneous equation associated to (4) (i.e., the case $\mathbf{b}(t) = \mathbf{0}$) is denoted as $\mathbf{z}_0(t)$. The only limitation we assume for the linear operator in (4) is that it commutes with the time translation operator $\mathcal{T}$, and it acts on functions $\mathbf{z}$ defined at least on the interval $[-r+s, s+T]$ where s is the initial time instant for (4).

Denoting as $\mathfrak{L}(\mathcal{T})$ the set of *all* the linear operators $\mathcal{L}_{\mathcal{T}}$ that commute with $\mathcal{T}$, a trivial verification of the definition conditions shows that $\mathfrak{L}(\mathcal{T})$ is a Banach algebra generated by $\mathcal{T}$ on the topological vector space $\mathcal{H}$, a Hilbert space made of functions $\mathbf{v}(t) : [-r+s, s+T] \to \mathbb{R}^n$.

After this brief but necessary introduction we can then formulate the main result of this contribution in the form of the following theorem:

Theorem (Generalized Floquet theorem)**.** *Let us consider the homogeneous part of system* (4) *with* $\mathcal{L}_{\mathcal{T}} \in \mathfrak{L}(\mathcal{T})$*, whose space of solutions is spanned by the state transition matrix* $\mathbf{X}(t; s)$ *(for* $s \leq t \leq s+T$*). The state transition matrix has then size* $n \times p$ *with* $p \leq +\infty$*, and can be written as* $\mathbf{X}(t; s) = \mathbf{M}(t; s)\exp[\mathbf{F}(t-s)]$*, where* $\mathbf{M}(t; s) \in \mathbb{R}^{n\times p}$ *is* T*-periodic in both variables (i.e.,* $\mathbf{M}(t+T; s) = \mathbf{M}(t; s)$ *and* $\mathbf{M}(t; s+T) = \mathbf{M}(t; s)$*) and* $\mathbf{F} \in \mathbb{R}^{p\times p}$ *is a constant matrix.*

Proof. The first part of the proof is devoted to the definition of the size of $\mathbf{X}(t; s)$. Let us consider the operator

$$\mathcal{L}"_{\mathcal{T}}\left\{\cdot\right\} = \frac{\mathrm{d}}{\mathrm{d}t}\left\{\cdot\right\} - \left\{\mathbf{A}(t)\cdot\right\} - \mathcal{L}_{\mathcal{T}}\left\{\cdot, t\right\}. \tag{5}$$

$\mathcal{L}"_{\mathcal{T}}$ is a linear operator acting on elements $\mathbf{z} \in \mathcal{H}$, the Hilbert space spanned by the functions $\mathbf{z} : [-r+s, s+T] \to \mathbb{R}^n$. Since the functions $\mathbf{z}$ are defined over the finite interval $[-r+s, s+T]$, $\mathcal{H}$ has an infinite countable dimension and according to [14], $\ker\left\{\mathcal{L}"_{\mathcal{T}}\right\}$ is a countable Hilbert space of dimension $p \leq +\infty$. As consequence $\mathbf{X}(t; s) \in \mathbb{R}^{n\times p}$.

Let us now turn to the form of $\mathbf{X}(t; s)$. We immediately see that $\mathcal{L}"_{\mathcal{T}}\{\mathbf{X}(t; s)\} = \mathbf{0}$ because it is a state transition matrix for (4), and clearly $\mathcal{T}\{\mathcal{L}"_{\mathcal{T}}\{\mathbf{X}(t; s)\}\} = \mathcal{T}\{\mathbf{0}\} = \mathbf{0}$. Since $\mathcal{T}$ commutes with $\mathcal{L}_{\mathcal{T}}$, with $\mathrm{d}^\alpha/\mathrm{d}t^\alpha$ for any $\alpha \in \mathbb{N}$, and, as can be easily proved, also commutes with all the time periodic matrices we get

$$\mathcal{T}\{\mathcal{L}"_{\mathcal{T}}\{\mathbf{X}(t; s)\}\} = \mathcal{L}"_{\mathcal{T}}\{\mathcal{T}\{\mathbf{X}(t; s)\}\} = \mathbf{0}. \tag{6}$$

Equation (6) implies that $\mathcal{T}\left\{\mathbf{X}(t; s)\right\}$ is a state transition matrix of (4). Being formed by the basis elements of the kernel of the linear operator $\mathcal{L}"_{\mathcal{T}}$, the state transition matrix $\mathcal{T}\left\{\mathbf{X}(t; s)\right\}$ can be expressed as a combination of the elements $\mathbf{k}_j(t)$ of a base of $\ker\{\mathcal{L}"_{\mathcal{T}}\}$, i.e. as a combination of the columns of $\mathbf{X}(t; s)$. From elementary representation theory, a representation of the linear operator $\mathcal{T}$ is a matrix, therefore such combination is linear. These remarks lead to

$$\mathcal{T}\left\{\mathbf{X}(t; s)\right\} = \mathbf{X}(t+T; s) = \mathbf{X}(t; s)\mathbf{C}. \tag{7}$$

where the matrix $\mathbf{C} \in \mathbb{R}^{p\times p}$ is constant because $\mathcal{T}$ commutes with $\mathrm{d}^\alpha/\mathrm{d}t^\alpha$.

Since the exponential function is never null, without any loss of generality we can require that the form of $\mathbf{X}(t; s)$ is $\mathbf{X}(t; s) = \mathbf{M}(t; s)\exp[\mathbf{F}(t-s)]$,where $\mathbf{F} \in \mathbb{R}^{p\times p}$ is a constant matrix. Using this in (7)

$$\begin{aligned}\mathcal{T}\left\{\mathbf{M}(t; s)\,\mathrm{e}^{\mathbf{F}(t-s)}\right\} &= \mathbf{M}(t+T; s)\,\mathrm{e}^{\mathbf{F}(t+T-s)} \\ &= \mathbf{M}(t; s)\,\mathrm{e}^{\mathbf{F}(t-s)}\,\mathbf{C}\end{aligned} \tag{8}$$

that is satisfied only if $\mathbf{C} = \exp(\mathbf{F}T)$ and $\mathbf{M}(t+T; s) = \mathbf{M}(t; s)$, that is the result we set to prove. Repeating the proof with a time translation operator acting on s, we finally find that $\mathbf{M}(t; s)$ is periodic also with respect to s. This completes the proof of the theorem.

Discussion. Because of the generalized Floquet theorem, a solution of the homogeneous part of (4) is

$$\mathbf{z}_0(t) = \mathbf{M}(t; 0)\,\mathrm{e}^{\mathbf{F}t}\,\mathbf{c}'_0 = \mathbf{M}(t; 0)\mathbf{Q}\,\mathrm{e}^{\mathbf{D}t}\,\mathbf{c}_0 \tag{9}$$

where $\mathbf{D} \in \mathbb{R}^{p\times p}$ is a diagonal matrix corresponding to the solution of the eigenvalue problem $\mathbf{FQ} = \mathbf{QD}$, and $\mathbf{c}'_0 = \mathbf{Q}\mathbf{c}_0 \in \mathbb{R}^m$ is a constant vector. Choosing $\mathbf{c}_0 = \mathbf{e}_j$ (the j-th element of the canonical unit vector base of $\mathbb{R}^p$), Eq. (9) yields the general form of the solution

$$\mathbf{z}_0(t) = \mathbf{r}_j(t)\,\mathrm{e}^{\lambda_j t} \qquad j = 1, \ldots, p, \tag{10}$$

where λ_j is the j-th diagonal element of $\mathbf{D}$ and $\mathbf{r}_j(t)$ is a T-periodic vector function. Dropping the index j, substituting (10) into (4) yields

$$\frac{\mathrm{d}\mathbf{r}}{\mathrm{d}t} + \lambda\mathbf{r} = \mathbf{A}(t)\mathbf{r} + \mathrm{e}^{-\lambda t}\,\mathcal{L}_{\mathcal{T}}\left\{\mathrm{e}^{\lambda t}\,\mathbf{r}, t\right\}, \tag{11}$$

where the last term on the right hand side is T-periodic because all the other terms are. The asymptotic stability analysis of the limit cycle $\mathbf{y}_\mathrm{S}$, therefore, clearly depends on the computation of all the eigenvalues of $\mathbf{F}$: this procedure depends on the explicit form of $\mathcal{L}_{\mathcal{T}}$, and in general leads to a set of p Floquet exponents λ (notice that according to the generalized Floquet theorem p may also be infinite).

Another important remark is that direct substitution proves that the general solution of (4) can be written as

$$\mathbf{z}(t) = \mathbf{X}(t; 0)\mathbf{c}_0 + \int_0^t \mathbf{X}(t; \tau)\mathbf{b}'(\tau)\,\mathrm{d}\tau \tag{12}$$

where $\mathbf{c}_0$ is a constant vector of size m, and $\mathbf{b}'(t)$ is a solution of

$$\mathbf{X}(0;0)\mathbf{b}'(t) = \mathbf{b}(t) + \mathcal{L}_{\mathcal{T}}\left\{\int_0^t \mathbf{X}(t;\tau)\mathbf{b}'(\tau)\ \mathrm{d}\tau\right\} - \int_0^t \mathcal{L}_{\mathcal{T}}\left\{\mathbf{X}(t;\tau)\right\}\mathbf{b}'(\tau)\ \mathrm{d}\tau. \tag{13}$$

Finally, the results of the theorem can be extended to operators of type (2) for $r \to +\infty$ under the following considerations: when $r \to +\infty$, because of the properties of $\mathbf{K}$, $\mathbf{K}(t,\tau) \to 0$ for $\tau \to -\infty$ and any t. For any $\epsilon > 0$ there is an $r = r(\epsilon)$ such that $\left|\int_{-\infty}^{t-r} \mathbf{K}(t;\tau)\mathbf{y}_{\mathrm{S}}\ \mathrm{d}\tau\right| < \epsilon$ being $\mathbf{y}_{\mathrm{S}}$ T-periodic and integrable. Thus, for any ϵ we can approximate a infinite memory system with (2). In this sense our theorem guarantees that the solution of the homogeneous part of system (4) is given by (10) for $t \in [-r+s, s+T]$ and for any $r < +\infty$.

Example. As an important example of application we consider the analysis of a driven Brownian particle with memory, where the memory part is due to the presence of a friction retardation function as discussed in [15]. The particle is subject to an external field with potential energy $U(\mathbf{x})$. According to [15], the memory particle Langevin equation is

$$\frac{\mathrm{d}\mathbf{v}}{\mathrm{d}t} = -\int_{t-r}^{t} \Gamma(t,\tau)\mathbf{v}(\tau)\ \mathrm{d}\tau - \nabla_{\mathbf{x}}U(\mathbf{x}) + \boldsymbol{\xi}(t) \tag{14}$$

where $\mathbf{v} = \mathrm{d}\mathbf{x}/\mathrm{d}t$, $\boldsymbol{\xi}(t)$ is the zero average Langevin source, and for a particle in thermal equilibrium the friction retardation function is [15] $\Gamma(t,\tau) = \frac{m}{k_{\mathrm{B}}\theta}\langle\boldsymbol{\xi}^{\mathrm{T}}(t)\boldsymbol{\xi}(\tau)\rangle$, where $\langle\cdot\rangle$ is the ensemble average, $^{\mathrm{T}}$ the transpose operation, m the particle mass, θ the absolute temperature, k_{B} the Boltzmann constant, and $r > 0$ such that $\int_{-\infty}^{t-r}\Gamma(t,\tau)\mathbf{v}(\tau)\ \mathrm{d}\tau \approx \mathbf{0}$. Considering an Ornstein-Uhlenbeck process where $\langle\boldsymbol{\xi}^{\mathrm{T}}(t)\boldsymbol{\xi}(\tau)\rangle = kk_{\mathrm{B}}\theta\mu\exp(-k|t-\tau|)$ [16] and the mobility is taken velocity dependent, i.e. $\mu = \mu[\langle v\rangle(\tau)]$, the friction retardation function reads

$$\Gamma(t,\tau) = \frac{k}{m}\mu[\langle v\rangle(\tau)]\,\mathrm{e}^{-k|t-\tau|}\,. \tag{15}$$

where $k = 1/\tau_{\mathrm{n}}$, τ_{n} is the noise correlation time, and v the magnitude of $\mathbf{v}$. Taking the average of (14) and using (15)

$$\frac{\mathrm{d}\langle\mathbf{v}\rangle}{\mathrm{d}t} = -\frac{k}{m}\int_{t-r}^{t}\mu[\langle v\rangle(\tau)]\,\mathrm{e}^{-k|t-\tau|}\,\langle\mathbf{v}\rangle(\tau)\ \mathrm{d}\tau - \langle\nabla_{\mathbf{x}}U(\mathbf{x})\rangle. \tag{16}$$

Equation (16) is coupled to $\langle\mathbf{v}\rangle = \mathrm{d}\langle\mathbf{x}\rangle/\mathrm{d}t$ thus leading to a problem of type (3) with unknown $\mathbf{y} = [\langle\mathbf{v}\rangle^{\mathrm{T}}\ \ \langle\mathbf{x}\rangle^{\mathrm{T}}]^{\mathrm{T}}$.

Linearizing around the periodic solution for $\boldsymbol{\xi} = \mathbf{0}$, the homogeneous variational memory equation reads (since $\tau \le t$)

$$\frac{\mathrm{d}\delta\mathbf{v}}{\mathrm{d}t} = -\frac{k}{m}\int_{t-r}^{t}\mu'(\tau)\,\mathrm{e}^{-k(t-\tau)}\,\delta\mathbf{v}(\tau)\ \mathrm{d}\tau - \mathbf{G}(t)\delta\mathbf{x} \tag{17}$$

where $\mu'(t) = \mu[\langle\mathbf{v}_{\mathrm{S}}\rangle(t)] + \nabla_{\mathbf{v}}\mu[\langle\mathbf{v}_{\mathrm{S}}\rangle(t)]^{\mathrm{T}}\langle\mathbf{v}_{\mathrm{S}}\rangle(t)$ and $\mathbf{G}(t) = \nabla_{\mathbf{x}}U(\langle\mathbf{x}_{\mathrm{S}}\rangle)$. Clearly, (17) is completed by $\delta\mathbf{v} = \mathrm{d}\delta\mathbf{x}/\mathrm{d}t$ therefore $\mathbf{z} = [\delta\mathbf{v}^{\mathrm{T}}\ \ \delta\mathbf{x}^{\mathrm{T}}]^{\mathrm{T}}$. According to the generalized Floquet theorem and the previous discussion, the solution of (17) is in the form (10). Decomposing $\mathbf{r}(t) = [\mathbf{r}_v^{\mathrm{T}}\ \ \mathbf{r}_x^{\mathrm{T}}]^{\mathrm{T}}$ into the velocity and position components, and being μ' and $\mathbf{r}_v$ T-periodic, the explicit form of (11) for the $\mathbf{v}$ part reads

$$\frac{\mathrm{d}\mathbf{r}_v}{\mathrm{d}t} + \lambda\mathbf{r}_v = -\mathbf{G}(t)\mathbf{r}_x - \sum_h \frac{k\tilde{\mu}'_h\tilde{\mathbf{r}}_{v,j-h}\left(1-\mathrm{e}^{-(k+\lambda+\mathrm{i}\omega_j)r}\right)}{m(k+\lambda+\mathrm{i}\omega_j)}\,\mathrm{e}^{\mathrm{i}\omega_j t} \tag{18}$$

where $\mathrm{i} = \sqrt{-1}$, $j \in \mathbb{Z}$, $\omega_j = j\omega_0$ ($\omega_0 = 2\pi/T$), and with $\tilde{\alpha}_j$ we indicate the j-th harmonic amplitude (in exponential form) of the generic T-periodic function $\alpha(t)$. Eq. (18) is completed by $\mathrm{d}\mathbf{r}_x/\mathrm{d}t + \lambda\mathbf{r}_x = \mathbf{r}_v$. Taking r large enough, for all λ satisfying $k > -\mathrm{Re}(\lambda)$, $\exp[-(k+\lambda+\mathrm{i}\omega_j)r]$ can be neglected. It is worth noticing that the last assumption is always satisfied for all λ with real part close to 0 or larger, and consequently responsible for bifurcations and instabilities. So, by looking at this subset of critical exponents, we neglect $\exp[-(k+\lambda+\mathrm{i}\omega_j)r]$, expand $\mathbf{G}(t)$ in Fourier series since it is also T-periodic, and finally by balancing the harmonic components in (18) we find the nonlinear eigenvalue problem

$$(\mathrm{i}\omega_j+\lambda)\,\tilde{\mathbf{r}}_{v,j} + \frac{k}{m(k+\lambda+\mathrm{i}\omega_j)}\sum_h\tilde{\mu}'_h\tilde{\mathbf{r}}_{v,j-h} + \sum_h\tilde{\mathbf{G}}_h\tilde{\mathbf{r}}_{x,j-h} = \mathbf{0}. \tag{19}$$

Of course, (19) is completed by the frequency domain version of the linear relation linking $\mathbf{r}_x(t)$ and $\mathbf{r}_v(t)$: $\mathrm{i}\omega_j\tilde{\mathbf{r}}_{x,j} + \lambda\tilde{\mathbf{r}}_{x,j} = \tilde{\mathbf{r}}_{v,j}$. Multiplying the infinite set (19) by $k+\lambda+\mathrm{i}\omega_j$ we obtain a polynomial eigenvalue problem (PEP) of order 2. The r order PEP has in general $r \times n$ (with n the number of equations) eigenvalues [17, 18], meaning that in our case $p = 2(n/2) + n/2 = 3n/2$. In order to numerically tackle this problem, we first reduce the PEP to a standard eigenvalue problem with the methods proposed in [17, 18] and then calculate the harmonics $\tilde{\mathbf{r}}_j$ as in [19].

Specifically, we consider the two-dimensional Brownian particle system studied in [20], and modify it by including memory. The potential energy is $U(\mathbf{x}) = 0.5(\bar{\omega}_1^2x_1^2 + \bar{\omega}_2^2x_2^2) = 0.5\bar{\boldsymbol{\omega}}^2\mathbf{x}$ where x_1 and x_2 are the

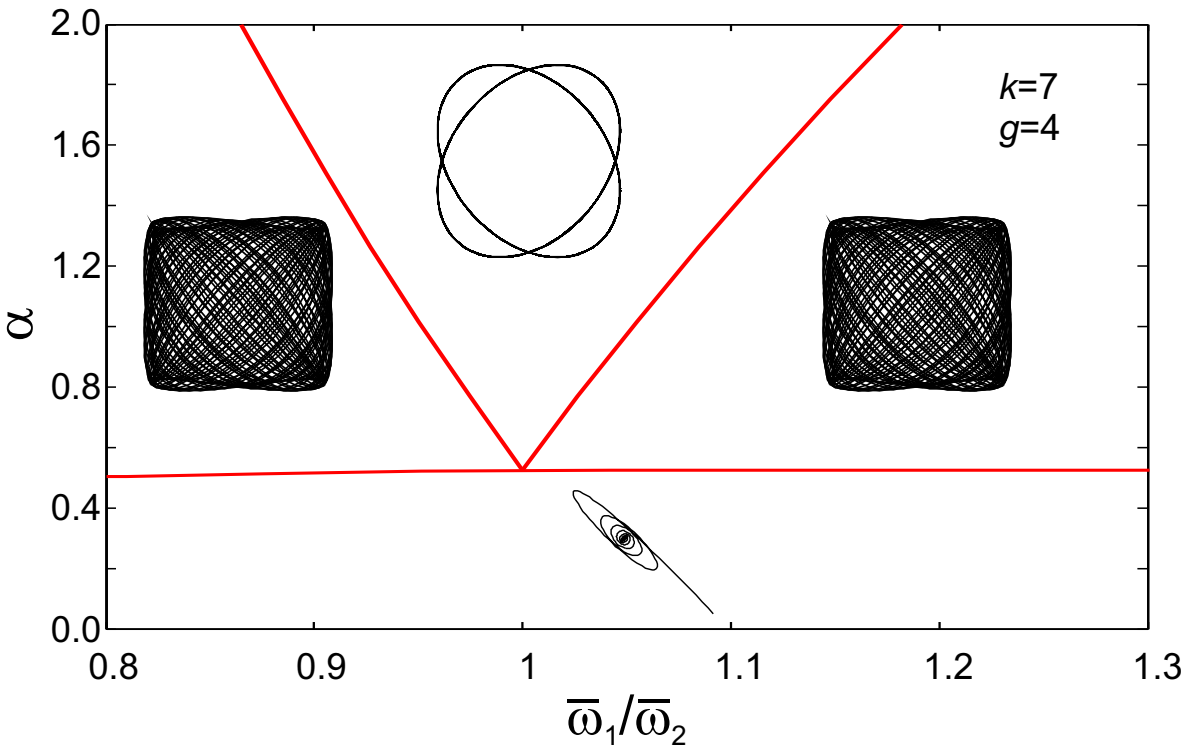

FIG. 1. Arnold tongue in the $(\bar{\omega}_1/\bar{\omega}_2, \alpha)$ plane for the driven Brownian particle with memory. Parameters: $\beta = 1$, $\bar{\omega}_1 = 2$.

two components of the position $\mathbf{x}$ of the particle, $\bar{\omega}_1$ and $\bar{\omega}_2$ are two constant parameters, and $\bar{\boldsymbol{\omega}} = \mathrm{diag}\,\{\bar{\omega_1}, \bar{\omega_2}\}$. This means that $\mathbf{G}(t) = \bar{\boldsymbol{\omega}}^2$ is constant, thus reducing the second series in (19) to $\bar{\boldsymbol{\omega}}^2\tilde{\mathbf{r}}_{x,j}$. According to [20], we use a corrected Rayleigh type model for the particle viscosity:

$$\mu[v(t,\tau)] = \gamma_{\mathrm{R}}[v(\tau)]\delta(t-\tau)\frac{m}{k} + g'\frac{m}{k^2}, \tag{20}$$

where $\gamma_{\mathrm{R}}(v) = -(\alpha - \beta v^2)$, $\alpha, \beta \geq 0$ and g' are parameters. We also define the parameter $g = g'/k$: notice that for constant g', a memoryless system is obtained for $k \to +\infty$. This means that (19) takes the form

$$\left(\mathrm{i}\omega_j + \lambda + \frac{g}{k + \lambda + \mathrm{i}\omega_j}\right)\tilde{\mathbf{r}}_{v,j} + \sum_h \tilde{\gamma}'_{\mathrm{R},h}\tilde{\mathbf{r}}_{v,j-h} + \\ + \bar{\boldsymbol{\omega}}^2\tilde{\mathbf{r}}_{x,j} = \mathbf{0} \tag{21}$$

where $\gamma'_{\mathrm{R}}(t) = \gamma_{\mathrm{R}}[\mathbf{v}_{\mathrm{S}}(t)] + \nabla_{\mathbf{v}}\gamma_{\mathrm{R}}[\mathbf{v}_{\mathrm{S}}(t)]^{\mathrm{T}}\mathbf{v}_{\mathrm{S}}(t)$. Since $n = 4$, according to the previous discussion $p = 6$. We implement a numerical solution of the second-order polynomial eigenvalue problem using $N = 30$, thus expanding (21) into a system for $j = -N, \ldots, N$. Furthermore, the limit cycle solution is calculated in the frequency domain exploiting the Harmonic Balance [19] numerical technique, again making use of 30 harmonics.

Concerning the numerical results, with respect to the memoryless case a stable equilibrium (originally unstable) is found in the origin of the phase space. A bifurcation diagram in the parameter space $(\bar{\omega}_1/\bar{\omega}_2, \alpha)$ is plotted in Fig. 1 for $k = 7$ and $g = 4$. An Arnold tongue is shown, separating a stable equilibrium for the lower α values (not present in [20]) from two symmetric, stable limit cycles (the inner part of the Arnold tongue). Out of the Arnold tongue, two similar strange attractors appear generated by the collapse of the two limit cycles as discussed in [20]. The bifurcation curves correspond to fold bifurcations, i.e., a Floquet exponent with zero imaginary part crossing the zero real part boundary.

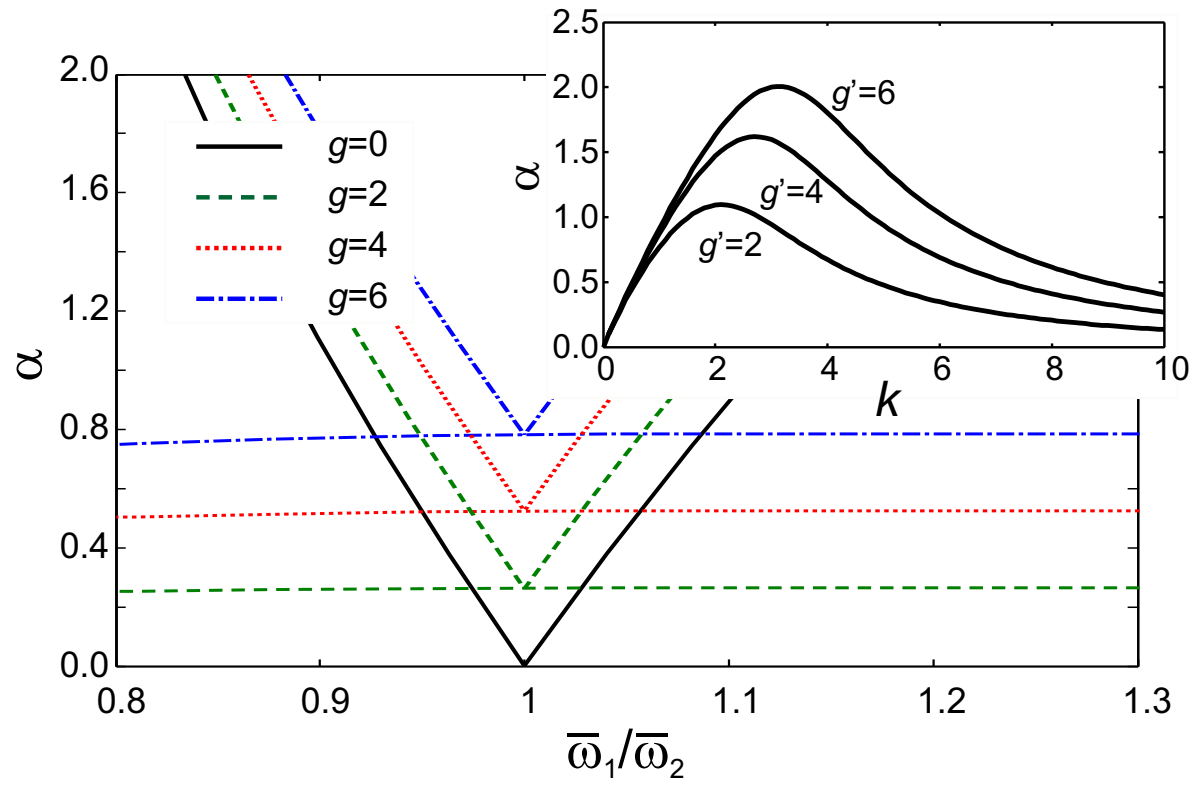

FIG. 2. Arnold tongue in the $(\bar{\omega}_1/\bar{\omega}_2, \alpha)$ plane for the driven Brownian particle with memory as a function of g; parameters: $\beta = 1$, $\bar{\omega}_1 = 2$, $k = 7$. Inset: Bifurcation curve in the triple point $(\bar{\omega}_1/\bar{\omega}_2 = 1)$ in the (k, α) plane as a function of g'; parameters: $\beta = 1$, $\bar{\omega}_1 = 2$.

The evolution of the Arnold tongue as a function of g and k, and the bifurcation curves associated to the triple point $\bar{\omega}_1/\bar{\omega}_2 = 1$ as a function of g', are shown in Fig. 2. The curves tend to zero for $k \to +\infty$ since in this limit the memory part of the system disappears.

Conclusions. In conclusion, we have stated and proved a theorem that generalizes the standard Floquet theory to systems whose state depends on the full past dynamics. As an example of application we have analyzed the dynamical properties of a Brownian particle with memory. Such a theorem greatly expands Floquet analysis to systems that were previously inaccessible by such theory, making it a tool with even greater potential in several areas of science and technology. Also, it is worth mentioning that the theorem we have proved applies also to Hamiltonian systems with non-local (albeit spatially periodic) interactions. Indeed, the standard Bloch theorem of solid-state physics [21] is a simple application of Floquet theory, obtained by replacing the time variable with the space variables. By the same token, our theorem is a generalization of Bloch theorem to non-local spatial correlations which can be generally cast in the form of Eq. (2), by replacing the time variable with the space variables. We thus expect it to be of great value to study the equilibrium properties of systems that are quite common in condensed matter physics.

Acknowledgments – This work has been partially supported by the Spanish government through project TEC2011-14253-E, by the NSF grant No. DMR-0802830, and the Center for Magnetic Recording Research at UCSD.

---

[*] fabiolorenzo.traversa@uab.es
[†] diventra@physics.ucsd.edu

[‡] fabrizio.bonani@polito.it

[1] G. Floquet, Annales de l'École Normale Supérieure **12**, 47 (1883).

[2] M. Farkas, *Periodic motions* (Springer-Verlag, New York, 1994).

[3] J. H. Shirley, Phys. Rev. **138**, B979 (1965).

[4] M. Moskalets and M. Büttiker, Phys. Rev. B **66**, 205320 (2002).

[5] L. Gammaitoni, P. Hänggi, P. Jung, and F. Marchesoni, Rev. Mod. Phys. **70**, 223 (1998).

[6] H. Haken, *Advanced synergetics* (Springer-Verlag, Heidelberg, 1983).

[7] R. P. Boland, T. Galla, and A. J. McKane, Phys. Rev. E **79**, 051131 (2009).

[8] A. Demir, A. Mehrotra, and J. Roychowdhury, IEEE Trans. Circuits Syst. I, Fundam. Theory Appl. **57**, 655 (2000).

[9] F. L. Traversa and F. Bonani, IEEE Trans. Circuits Syst. I, Regul. Pap. **58**, 2485 (2011).

[10] J. Guckenheimer and P. Holmes, *Nonlinear oscillations, dynamical systems, and bifurcations of vector fields*, Applied Mathematical Sciences (Springer-Verlag, New York, 1983).

[11] Y. V. Pershin and M. Di Ventra, Advances in Physics **60**, 145 (2011).

[12] Y. V. Pershin and M. Di Ventra, Proc. IEEE **100**, 2071 (2012).

[13] J. K. Hale and S. M. Verduyn Lunel, *Introduction to functional-differential equations*, Applied Mathematical Sciences, Vol. 99 (Springer-Verlag, New York, 1993).

[14] W. Rudin, *Functional analysis* (McGraw-Hill, New York, 1991).

[15] R. Kubo, M. Toda, and N. Hashitsume, *Statistical Physics II: Nonequilibrium Statistical Mechanics*, 2nd ed. (Springer-Verlag, 1991).

[16] P. Hänggi and P. Jung, "Colored noise in dynamical systems," in *Advances in Chemical Physics*, Vol. LXXXIX, edited by I. Prigogine and S. A. Rice (John Wiley & Sons, 1995) pp. 239–326.

[17] F. Tisseur and N. Higham, SIAM. J. Matrix Anal. & Appl. **23**, 187 (2001).

[18] N. Higham and F. Tisseur, Linear Algebra Appl. **351–352**, 435 (2002).

[19] F. L. Traversa, F. Bonani, and S. Donati Guerrieri, Int. J. Circuit Theory Appl. **36**, 421 (2008).

[20] U. Erdmann, W. Ebeling, and V. S. Anishchenko, Physical Review E **65**, 061106 (2002).

[21] F. Bloch, Zeitschrift fur Physik **52**, 555 (1929).